1、技术参数 Technical Parameter



- 公称压力: 6.3MPa
  Nominal Pressure: 6.3MPa
- 适用介质 :R12,R22,R502,R134a,R404a,R507,R717 等制冷剂。
  Applicable Medium: R12, R22, R502, R134a, R404a, R507,R717 andother refrigerants.
- 适用温度: -46℃ ~ +150℃
  Applicable Temperature: -46℃ ~ +150℃
- 压力调整范围 L: 0-16bar; H: 6-35bar
  pressure adjustment range L: 0-16bar; H: 6-35bar

2、说明 Instruction


DPV 压差导阀与先导主阀 DFSV 系列匹配, 保持阀前后压力差恒定。
The DPV differential pressure pilot valve is matched with the pilot main valve DFSV series to keep the pressure difference between the front and back of the valve constant.

3、订货 Order Goods

- 订货时, 需指定型号、设定压力值、压力调节范围 .
  When order, please specify the model, the setting pressure value, and the pressure adjustment range
- 例: DPV, 4bar 表示: 压差导阀; 压力调节范围: 0~16bar; 出厂设定压力: 4bar
  E.g.: DPV, 4bar. It Means: differential pressure pilot valve; pressure adjustment range: 0~16bar; factory setting pressure: 4bar
  如不指定设定压力、压力调整范围, 出厂默认设定压力值为 4bar, 压力调整范围: 0~16bar
  If the setting pressure and pressure adjustment range are not specified, the factory default setting pressure is 4bar, and the pressure adjustment range is 0~16bar.

型号 Model	KV 值 KV Value	温度范围 Temperature Range		压力范围 Pressure Range
	m3/h	° C	° F	Bar
DPV-L	0.43	-46/+150	-50.8/+302	0 ~ 16
DPV-H	0.43	-46/+150	-50.8/+302	6 ~ 35

DPV - 基本尺寸 / 材料规格
DPV - Basic Dimensions / Material Specifications

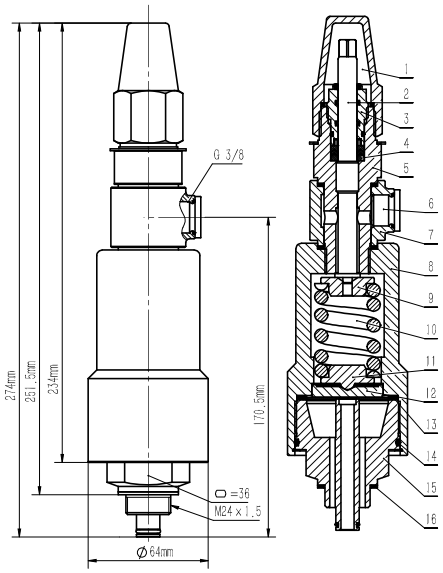

重量: 约 2.587 KG Weight: about 2.587 KG

序号 NO.	名称 Name	材质 Material
1	铝帽 Al-cap	铝 Aluminum
2	阀杆 Valve Rod	不锈钢 Stainless Steel
3	填料函 Stuffing Box	不锈钢 Stainless Steel
4	密封填料 Seal Packing	聚四氟乙烯 PTFE
5	阀帽 Bonnet	钢 Steel
6	螺塞 Plug Screw G3/8	钢 Steel
7	连接座 Connecting Base	钢 Steel
8	阀盖 Valve Cap	钢 Steel
9	弹簧上座 Spring Seat	钢 Steel
10	弹簧 Spring	不锈钢 Stainless Steel
11	弹簧下座 Spring Lower Seat	钢 Steel
12	密封座 Seal Seat	钢 Steel
13	膜片 Diaphragm	不锈钢 Stainless Steel
14	O 型圈 O Ring	橡胶 Rubber
15	导阀座 Pilot Valve Seat	钢 Steel
16	纤维垫圈 Fiber Washer	纤维非石棉 Non-asbestos Fiber