1、技术参数 Technical Parameters

- 公称通径 :DN15-DN50
  Nominal Diameter: DN15-DN50
- 公称压力: 6.3MPa
  Nominal Pressure: 6.3MPa
- 适用介质 :R12,R22,R502,R134a,R404a,R507,R717 等制冷剂。
  Applicable Medium: R12, R22, R502, R134a, R404a, R507,R717 and other refrigerants.
- 适用温度: -46℃ ~ +150℃
  Applicable Temperature: -46℃ ~ +150℃
- 结构形式: 角式结构代号 A 直通结构代号 S
  Structure Form: Angle Type Structure code is A
  Straight Type Structure code is S


2、说明 Instruction


SCL 长颈截止止回阀系列产品用于介质向一个方向流动, 阻止介质逆流的管路, 是内置截止阀功能的止回阀。在介质压力作用下, 阀瓣打开; 当介质反向流动时, 介质压力和阀瓣自重作用于阀座, 从而阻止介质逆流。

SCL long neck stop check valve series are used for the pipeline where the medium flows in one direction and prevents the medium from flowing backward. It is a check valve with built-in stop valve function. Under the action of the medium pressure, the disc opens; when the medium flows in the reverse direction, the medium pressure and the self-weight of the disc act on the valve seat, thereby preventing the medium from flowing backward.

3、订货 Order Goods

- 订货时, 需指定型号、结构形式;
  Please tell us the model and structural type you want when ordering.
- 例: SCL - A 65
  E.g.: SCL - A 65
  表示: DN65 长颈截止止回阀, 结构形式为角式
  It means DN65 long neck stop check valve, the structure is angle type

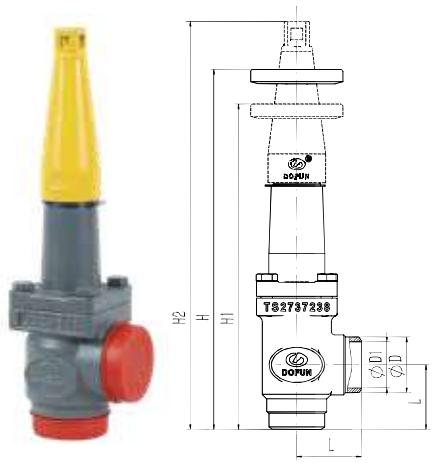

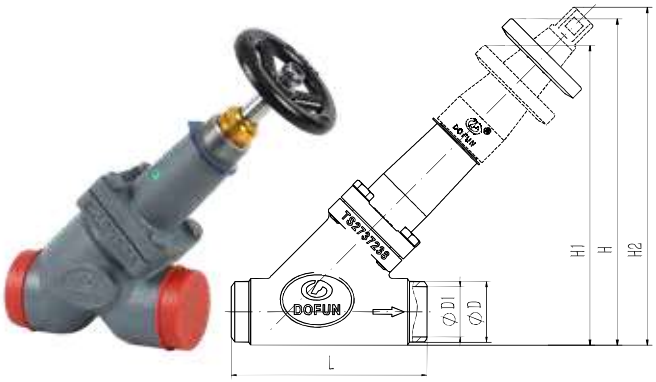

角式 PN63 长颈截止止回阀 Angle Type PN63 Long Neck Stop Check Valve

型号 Model	通径 Nominal Diameter (DN)	尺寸 Size (mm)					
		ΦD	ΦD1	L	H	H1	H2
SCL-A	15	21.3	15	45	267	223	267
	20	27	20	45	267	223	267
	25	33.7	25	45	267	223	267
	32	38	32	49.5	263	235	277
	40	48.3	38	56	312	282	354
	50	60.3	49	60	292	262	330

直通 PN63 长颈截止止回阀 Straight Type PN63 Long Neck Stop Check Valve

型号 Model	通径 Nominal Diameter (DN)	尺寸 Size (mm)					
		ΦD	ΦD1	L	H	H1	H2
SCL-S	15	21.3	15	120	245	223	200
	20	27	20	120	245	223	200
	25	33.7	25	120	245	223	200
	32	38	32	128	221	202	210
	40	48.3	38	156	260	239	269
	50	60.3	49	149	260	238	267